


Item # OPTI 4014, Permanent Magnet DC Motors - OPTI 4000 Series

The OPTI 4000 provides the ultimate combination of design flexibility and performance. The unique rectangular shaped metal yoke yields high output torques in a compact size.

- 1/17 hp up to 1/3 hp
- Speeds up to 3500 rpm
- 12 up to 130 VDC
- 0.500" Maximum Shaft Diameter
- 2.015" Standard Pilot Diameter
- Class "F" Insulation

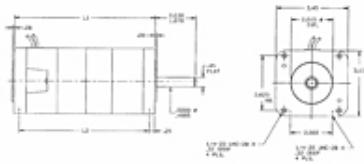

[FEATURES](#) · [SPECIFICATIONS](#)

FEATURES

- High Energy Ceramic Magnets
- Double Shielded Ball Bearings
- Dynamically Balanced Armature
- Reversible Design
- 8" Leads
- TENV Design
- Externally Replaceable Brushes
- High Efficiency Rectangular Metal Shell
- Auto-Hook Tang Type Commutator
- Value added options and modifications available

SPECIFICATIONS

Voltage Range	12 up to 130 V
Speed	0 up to 3500 rpm
Continuous Torque DC Rating ¹	65.0 in·oz
Continuous Torque SCR Rating	33.0 in·oz
Weight	7.10 lbs

HP Rating	0 up to 1/6
Max. Shaft Diameter	0.500 in.
Standard Pilot Diameter	2.015 in.
L1 M1500	5.600/5.550 in.
L2 M1503	5.100/5.050 in.
Insulation	Class "F"
Lead Length	8 in

1 DC rating based on 1.00 formfactor; SCR rating based on 1.4 formfactor, 25°C ambient